


OPX REC

Transportweg 50, 2421 LS NIEUWKOOP
 Postbus 136, 2420 AC NIEUWKOOP
 Telefoon: +31 (0)172 574668
 E-mail: info@caltrading.nl
 Internet: www.caltrading.nl

Ontwerpdruk: 10 bar
 Vermogen: 1163-9302 kW

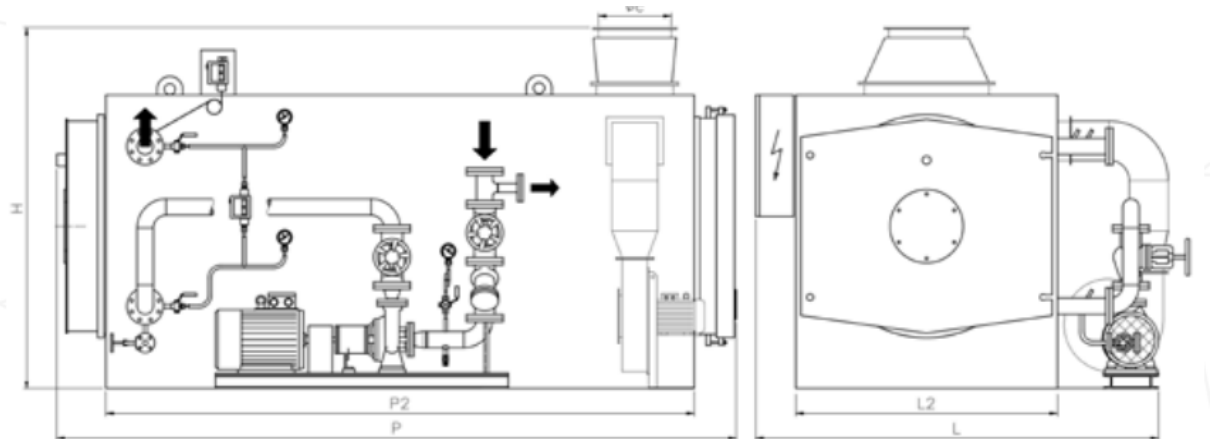

DIMENSIONS

Model	H	L	L2	P	P2	ØC	N1	N2
OPX REC	mm	mm	mm	mm	mm	mm	DN/in	DN/in
1000	2000	2150	1430	3800	3420	400	80	80
1200	2120	2300	1560	4300	3870	450	100	100
1500	2250	2500	1650	4600	4000	500	100	100
2000	2700	2700	2100	4700	4628	550	125	125
2500	2900	2900	2200	5200	4976	600	125	125
3000	2850	3000	2300	5600	5394	600	150	150
4000	3300	3300	2500	6350	6152	650	150	150
5000	3800	3450	2800	7000	6278	700	200	200
6000	3800	3600	2800	7750	7028	800	200	200
8000	3800	3750	2800	8000	7278	850	200	200

TECHNICAL DATA

Model	Heat output	Flow thermal	Oil side pressure drop	TS max. operating temperature	Total volume oil	Flue gas pressure drop	Gas consump.	Diesel fuel consump.	Nafta consump.	Total weight
OPX REC	kW	kW	mbar	°C	lt	mbar	Nm ³ /h	kg/h	kg/h	kg
1000	1163	1277	1680	290	460	5,5	130,7	107,6	113,2	3500
1200	1395	1533	1000	290	680	6,0	156,9	129,2	135,9	4800
1500	1744	1916	1700	290	700	7,5	196,2	161,6	169,9	5000
2000	2326	2555	1600	290	1350	8,0	261,5	215,4	226,5	9500
2500	2907	3194	1300	290	1600	9,0	327,0	269,3	283,2	10500
3000	3488	3833	1800	290	1520	10,0	392,4	323,1	339,8	11500
4000	4651	5110	2000	290	2300	12,0	523,2	430,9	453,1	14300
5000	5814	6388	1900	290	2500	15,0	654,0	538,6	566,4	16300
6000	6977	7666	2000	290	2800	18,0	784,9	646,4	679,7	21000
8000	9302	10222	2900	290	3650	19,0	1046,5	861,9	906,3	28000

